



DK50 6x4VRT/M

for central air distribution systems

- modular design
- compact solution
- if one pump fails the rest continue to perform
- remote monitoring system
- wide range of optional equipment
- easy maintenance


Options

- noise reduction covering
- central intake filter system
- enhanced drying and filtering



DK50 6x4VRT/M

DK50 6x4VRTS/M

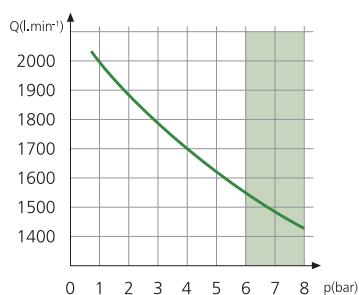

External text display with Ethernet port



Refrigeration dryer



Air tank

	V/Hz	kW	l.min ⁻¹ /5 bar	lit.	bar	S1-S3	°C	dB[A]	kg	mm
DK50 6x4VRT/M								≤ 83	350* ³ 66* ⁴ 127* ⁵	1240 x 1750 x 630* ³ 760 x 1015 x 550* ⁴ 770 x 2100 x 705* ⁵
DK50 6x4VRTS/M	3x400/50	6x2,2	1615	500	6 - 8* ¹	S1 - 100%	-22* ²	≤ 72	483* ³ 66* ⁴ 127* ⁵	1250 x 1790 x 705* ³ 760 x 1015 x 550* ⁴ 770 x 2100 x 705* ⁵

*1 Other working pressures on demand. *2 Degree of air drying (atmospheric dew point). *3 Compressor. *4 Refrigeration dryer. *5 Air Tank. Technical modifications are subject to change.



EKOM spol. s r.o.
Priemyselná 5031/18
921 01 PIEŠŤANY
Slovak Republic

tel.: +421 33 7967205
fax: +421 33 7967223
e-mail: ekom@ekom.sk
www.ekom.sk

